

Trusted for Quality & Integrity



JINDAL INDUSTRIES PRIVATE LIMITED, HISAR

Galvanized Tubes & Pipes | MS Black Tubes & Pipes | Hollow Sections | Line Pipe (API Tubes) | Swaged Poles



Shaping the future infrastructure




About Us:

Jindal Industries Pvt. Limited, HISAR, is one of the reputed industrial house, and a part of the JINDALS, who have proved their unerring might in steel sector and reckoned with high esteem in the pipe manufacturing industry.

Set up in the year 1980, JINDAL-HISSAR plant is the most advanced state-of-the-art facility equipped with Modern Manufacturing Machineries. Besides having all the plants under one roof - from Rolling Milling, Welding to Galvanizing the plant has a fully functional in-house maintenance Workshop and Laboratory Testing facility. The plant is well equipped to manufacture best Quality MS Black and Galvanized Pipes & Tubes in the range of 15mm to 300mm as per National and International standards besides other variants.

In the Past five years the company has experienced manifold growth due to our relentless endeavour to maintain higher standards of Quality and service to our worthy Customers.

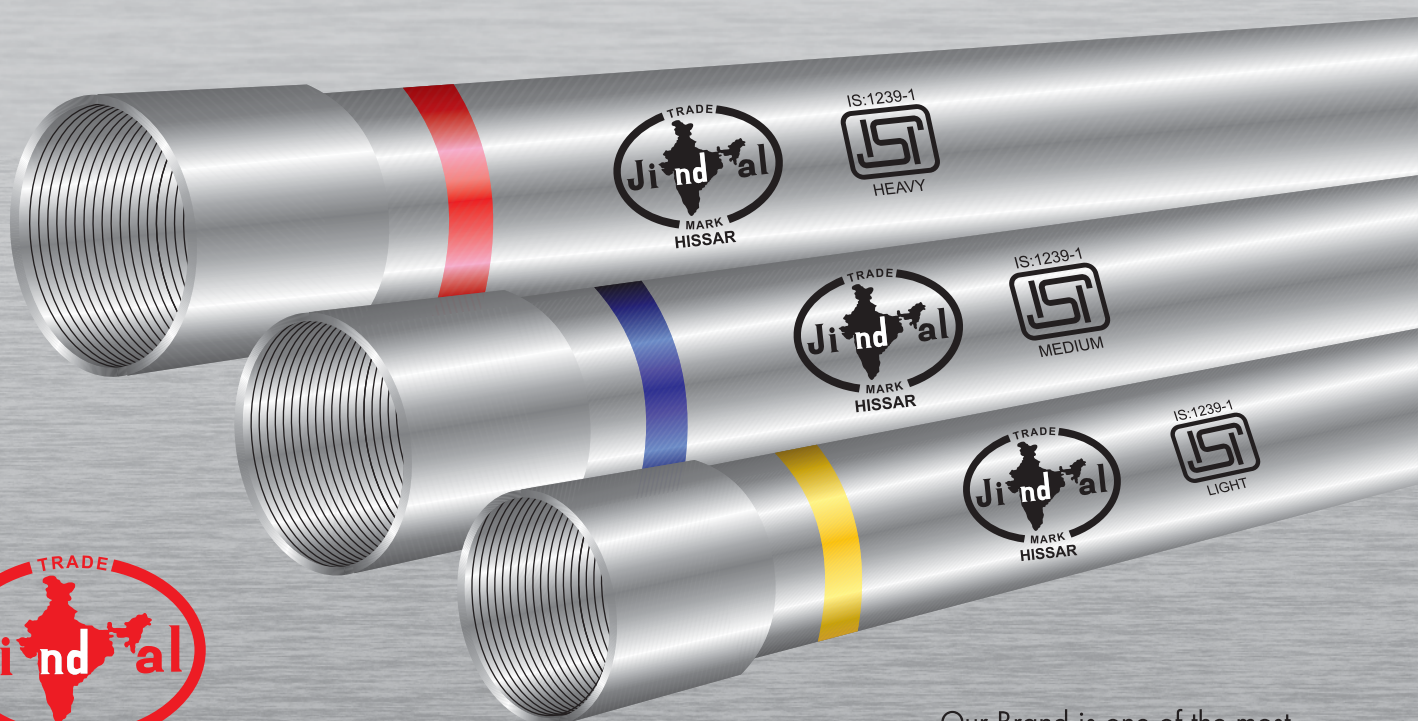

Our Brand is one of the most trusted brand in the market

Steel Hollow Sections

(Square, Rectangular and Circular) for Structural Purpose

JINDAL-HISSAR, products have earned the reputation of impeccable Quality and total Reliability. The name has become synonyms with the best in Steel Hollow Sections and Tubes. Manufactured in its state-of-the-art manufacturing plant, the Hollow Sections are regarded best for their excellent quality and reliability. Having BIS certification and backed by our reputed Brand name our Hollow Sections offer most comprehensive range in SHS 25 x 25mm to 220 x 220mm and RHS 50 x 25mm to 200 x 100mm.

Hollow sections are supplied to clients nationwide for a variety of applications including mechanical engineering for example, manufacturing of booms, frames and other vehicle components, especially for applications where high strength combined with excellent usability is needed. With high torsion rigidity and compressive strength, these hollow sections are comparably more efficient than conventional steel sections. The excellent distribution of material around the axis of the square and rectangular steel hollow sections allows for remarkable strength qualities and thus offers decisive advantages in its applications. The smooth and uniform profile of the section minimizes corrosion and facilitates easy, onsite fabrication to significantly enhance the aesthetics of structures. A higher strength to weight ration credits these sections with nearly 20% reduction in the use of steel.





We never compromise on Quality

Adhering to the stringent Quality Standards has always been our motto. Whatever the circumstances may arise, we always remain stubborn as far as Quality is concerned. It is our Quality that makes us Unique. To check Quality at every stage of production Jindal Industries has its own set of strict procedure in compliance with International Standards. Various Accreditations and Certifications are testimony to our commitment to Quality and Service.

Our in-house Testing facilities are considered best in the industry.

Certification




ISO 9001:2015



OHSAS 45001:2018



ISO 14001:2015



Inspection Agencies



Product Range

- Black Pipes** - ½"(15mm NB) to 12"(300mm NB) to various National & International Standards
- Galvanised Pipes** - ½"(15mm NB) to 12"(300mm NB) to various National & International Standards
- API (Line Pipes)** - 80mm to 300mm API Pipes upto Grade X70
- Hollow Sections** - Rectangular & Square from 25mm x 25mm to 250mm x 250mm, Black & GI
- Poles** - Swaged Tubular Poles from 410 SP 1 to 410 SP 66

Grades

Conforming To Stringent Specifications

a) Indian Standards

- i) IS:1239-1 - For Ordinary Use In Water, Gas, Air Lines & Fire Fighting
- ii) IS:3589 - Grade Fe330 & 410 For Water, Gas & Sewage Purpose
- iii) IS:4270 - Grade Fe 410, Steel Tubes For Water Wells (Casing Pipes)
- iv) IS:1161 - Grade Yst 210, 240, 310 & 355 For Structural Purpose
- v) IS:3601 - Steel Tubes For Mechanical & General Engineering
- vi) IS:9295 - Grade Yst 210, 240 & 310 for Idlers & Conveyors
- vii) IS/ISO:3183 - Grade Yst 210 & 240 For Use In Oil & Natural Gas Industries
- viii) IS:2713 - Swaged type steel Tubular Poles 410 SP 1 to 410 SP 72.
- ix) IS:4923 - RHS & SHS, Grade Yst 210, 240, 310 & 355 For Structural Purpose

b) International Standards

1) British

- i) BS:1387 - For Ordinary Use In Water, Gas Lines
- ii) BS:1775 - for Mechanical, Structural & General Engineering
- iii) BS:1139 - Tubes For Metal Scaffolding
- iv) BS:534 - For Water, Gas & Sewage
- v) BS:6363 - Structural Tubes, Round Square & Rectangular Shape

2) American

- i) ASTM A53 - For Ordinary Use In Water, Gas & Air Lines with UI Certification
- ii) ASTM A120 - For Ordinary Use In Agriculture & Air Lines
- iii) ASTM A 795 - For Fire Protection Use With UI Certification
- iv) ASTM A 500 - Structural Tubes Round, Square & Rectangular Shape
- v) AP15L - For Oil & Gas Conveying At High Pressure

3) European

- i) EN 10224- For Use In Water, Gas & Air Flow
- ii) EN 10255- For Water, Gas & Air Flow With Ce Certification

4) Japanese

- i) JIS G 3452 - For Use In Water, Gas & Air Flow

Equipment Details

Slitting unit

ERW Pipe Mills

Annealing

Eddy Current Testing

End Facers

Hydro Testing M/c

Ultrasonic Testing M/c

Galvanising Lines

Auto Varnishing Lines

Threading M/c



Grooving M/c

Power Plant

A P P L I C A T I O N S



**Oil & Gas Transportation
General Engineering
Agriculture & Irrigation
Concealed Piping
Cold Storage
Fire Fighting System
Construction Scaffolding
Water Lines
Structural Purposes**

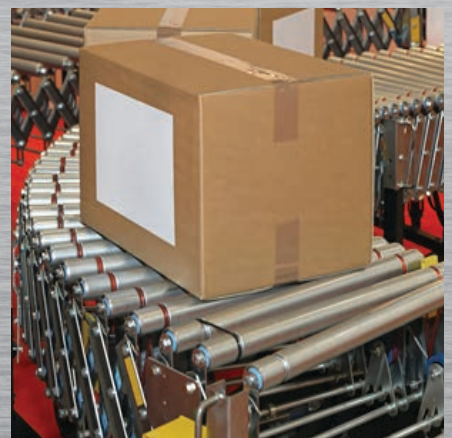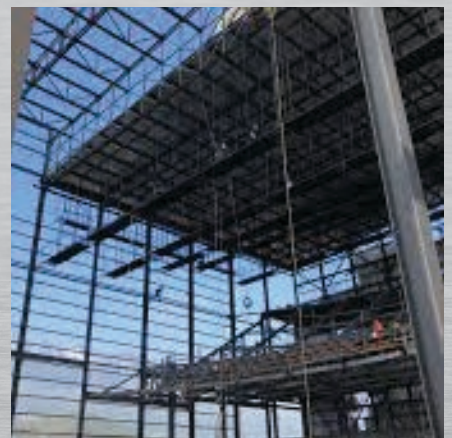

GALVANISED & BLACK PIPES FOR WATER, GAS & AIR

TECHNICAL DATA OF BLACK & GALVANISED PIPES

SPECIFICATION IS:1239(PART-1):2004 - DIN 2440, DIN 2441

(EQUIVALENT BS:1387:1990/EN-10255:2004*/DIN EN 10240 : 1998)

NB (mm)	SERIES	OUTSIDE DIAMETER		WALL THICKNESS		NOMINAL WEIGHT GALVANISED & BLACK TUBES				SOCKETS	
		MIN. (mm)	MAX. (mm)	MM	SWG	PLAIN END		SCREWED & SOCKETED		OD in mm	Length in mm
						Kg/M	Mtrs/Ton	Kg/M	Mtrs/Ton		
15	Light	21.0	21.4	2.0	14	0.95	1052	0.96	1046	27	37
	Medium	21.0	21.8	2.6	12	1.21	826	1.22	820		
	Heavy	21.0	21.8	3.2	10	1.44	694	1.45	690		
20	Light	26.4	26.9	2.3	13	1.38	725	1.39	719	32.5	39
	Medium	26.5	27.3	2.6	12	1.56	641	1.57	637		
	Heavy	26.5	27.3	3.2	10	1.87	535	1.88	532		
25	Light	33.2	33.8	2.6	12	1.98	505	2.00	500	39.5	46
	Medium	33.3	34.2	3.2	10	2.41	415	2.43	412		
	Heavy	33.3	34.2	4.0	8	2.93	341	2.95	339		
32	Light	41.9	42.5	2.6	12	2.54	394	2.57	389	49	51
	Medium	42.0	42.9	3.2	10	3.10	322	3.13	319		
	Heavy	42.0	42.9	4.0	8	3.79	264	3.82	262		
40	Light	47.8	48.4	2.9	11	3.23	310	3.27	306	56	51
	Medium	47.8	48.8	3.2	10	3.56	281	3.60	278		
	Heavy	47.9	48.8	4.0	8	4.37	229	4.41	227		
50	Light	59.6	60.2	2.9	11	4.08	245	4.15	241	68	60
	Medium	59.7	60.8	3.6	9	5.03	199	5.10	196		
	Heavy	59.7	60.8	4.5	7	6.19	161	6.26	160		
65	Light	75.2	76.0	3.2	10	5.74	175	5.83	172	84	69
	Medium	75.3	76.6	3.6	9	6.42	156	6.54	153		
	Heavy	75.3	76.6	4.5	7	7.93	126	8.05	124		
80	Light	87.9	88.7	3.2	10	6.72	149	6.89	145	98	75
	Medium	88.0	89.5	4.0	8	8.36	120	8.53	117		
	Heavy	88.0	89.5	4.8	6	9.90	101	10.10	96		
100	Light	113.0	113.9	3.6	9	9.75	102	10.00	100	124	87
	Medium	113.1	115.0	4.5	7	12.20	82	12.50	80		
	Heavy	113.1	115.0	5.4	5	14.50	69	14.80	68		
125	Medium	138.5	140.8	4.8	6	15.90	63	16.40	61	151	96
	Heavy	138.5	140.8	5.4	5	17.90	56	18.40	54		
150	Medium	163.9	166.5	4.8	6	18.90	53	19.50	51	178	96
	Heavy	163.9	166.5	5.4	5	21.30	47	21.90	46		

Tolerances

a) Thickness

Light Tubes : + Not limited
-8%

Medium & Heavy Tubes :
+ Not limited
-10%

b) Weight

Light Series

Single Tube : +10% / -8%

For Quantities per Load of

10 Tonnes Minimum : +7.5%, -5%

Medium & Heavy Series

Single Tube : ±10%

For Quantities per Load of

10 Tonnes Minimum : ±7.5%

c) Length

Normal : 6 mtr + 0.03 mtr

Random Length 4 to 7 Mtrs

Or as specified by Customer

d) Hydro Test

Each pipe is tested for leak proof test at 51 kgs/cm²

e) End condition

A) PLAIN END

B) BEVEL END


C) SCREWED & SOCKETED

D) SCREWED END TUBE

E) AS PER CUSTOMER SPECIFICATION

*This specification conforms to CE Mark conferred by Det Norske Veritas 13315-2018-CE-IND-DNV

JINDAL-HISSAR MANUFACTURES PIPE SIZE 15mm NB to 150mm NB, BOTH BLACK & GI, BIS LICENCE NO. CM/L - 0458956

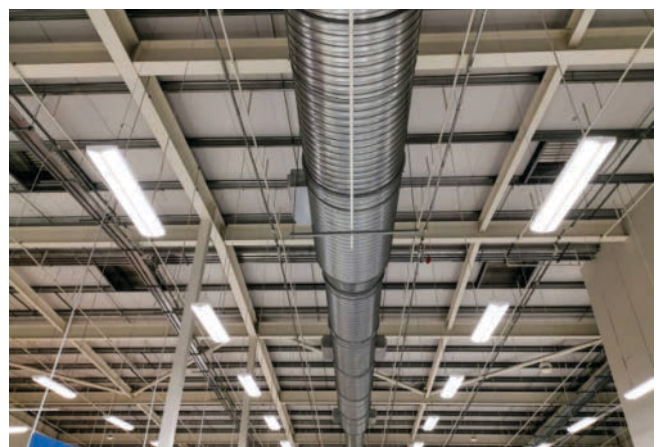

ERW STEEL TUBES FOR WATER & SEWAGE PURPOSE

CONFORMING TO IS: 3589 : 2001
Grade Fe 330 and Fe 410/ EN 10224




NB (mm)	OUTSIDE DIAMETER (mm)	WALL THICKNESS (mm)	WEIGHT (PLAIN END)	MTR/TON
150	168.3	2.6	10.6	94
		3.2	13.0	77
		4.0	16.2	62
		4.5	18.2	55
175	193.7	2.6	12.3	81
		3.6	16.9	59
		4.5	21.0	48
		6.3	29.1	34
200	219.1	2.6	13.9	72
		3.6	19.1	52
		4.5	23.8	42
		6.3	33.1	30
250	273.0	3.6	23.9	42
		4.0	26.5	38
		5.0	33.0	30
		6.3	41.1	24
300	323.9	4.0	31.8	31
		4.5	35.4	28
		5.6	44.0	23
		7.1	55.5	18

TOLERANCES	
OUTSIDE DIAMETER OF PIPE	± 0.75%
OVALITY	1% Max.
THICKNESS	± 10%
LENGTH	
Unless other specified, length are in Single Random Length of 4 to 7 Mtr.	
WEIGHT : Mass per Truck Load of 10 Tons or above	± 7.5%

PHYSICAL PROPERTIES			
GRADE	Y.S. (MIN)	T.S. (MIN)	%Elongation (MIN)
Fe 330	195	330	20
Fe 410	235	410	18

Note:
These are preferred OD & Thickness. Other Sizes not included may be supplied as per Customer Specification.

JINDAL-HISSAR MANUFACTURES PIPE SIZE 150mm NB to 300mm NB, BOTH BLACK & GI, BIS LICENCE NO. CM/L - 9402267

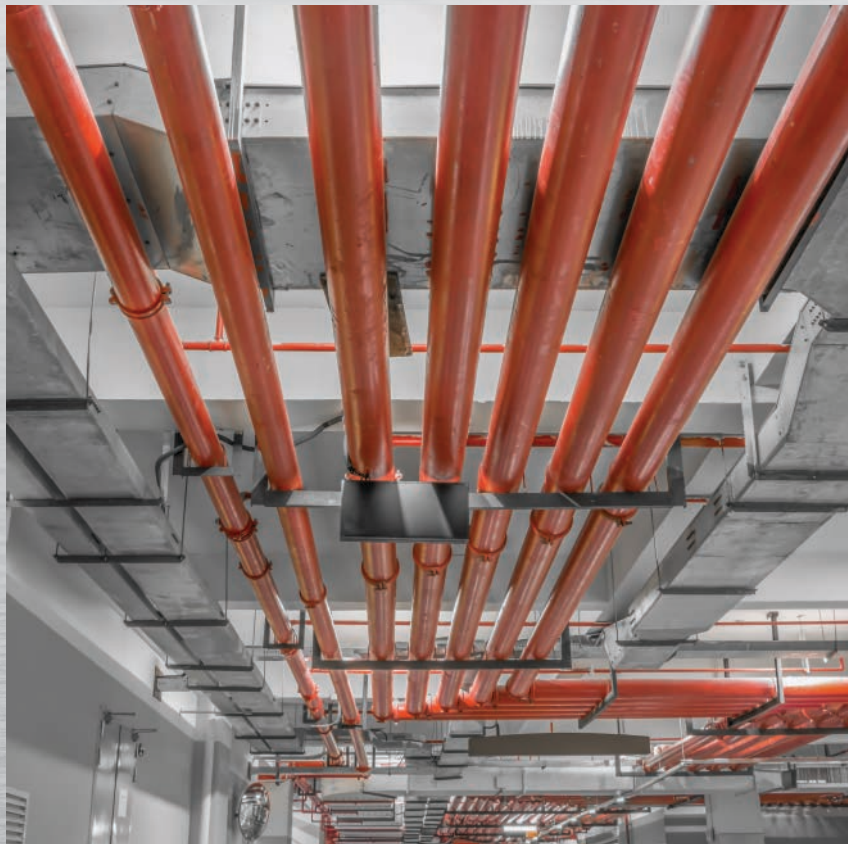

ERW STEEL TUBES FOR WATER WELLS CONFORMING

TO IS: 4270 : 2001

PLAIN END CASING PIPES

NB (mm)	OUTSIDE DIAMETER (mm)	WALL THICKNESS (mm)	WEIGHT (PLAIN END)	MTR/TON
100	114.3	5	13.48	74
		5.4	14.5	69
125	141.3	5	16.8	60
		5.4	18.1	55
		7.1	23.5	43
150	168.3	5	20.13	50
		5.4	21.6	46
		7.1	28.2	35
175	193.7	5.4	25.1	40
		6.4	29.6	34
		8	36.6	27
200	219.1	5.4	28.46	35
		6.7	33.6	30
		8	41.6	24
250	273.1	7.1	46.57	21
		8	52.3	19
		10	64.9	15
300	323.9	7.1	55.47	18
		8	62.3	16
		10	77.4	13



TOLERANCES	
OUTSIDE DIAMETER OF PIPE	± 1%
THICKNESS	
Upto 406.4mm OD	± 10%
LENGTH	
Unless other specified, length are in Single Random Length of 4 to 7 Mtr.	
WEIGHT : Single Tube	+10%, -8%

PHYSICAL PROPERTIES			
GRADE	Y.S. (min)	T.S. (min)	%Elongation (MIN)
Fe 410	235	410	15

Note:

Higher Thickness other than the Specified may also be manufactured as per Customer requirement.

JINDAL-HISSAR MANUFACTURES PIPE SIZE 100mm NB to 300mm NB, BOTH BLACK & GI, BIS LICENCE NO. CM/L - 9517082

Slotting of pipes can be done as per customer requirement.





STEEL TUBES FOR STRUCTURAL PURPOSES

TECHNICAL DATA OF BLACK & GALVANISED PIPES
SPECIFICATION IS:1161: 2014

NB (mm)	OUTSIDE DIAMETER (mm)	WALL THICKNESS (mm)	NOMINAL WEIGHT GALVANISED & BLACK TUBES	
			PLAIN END	
			Kg/M	Mtr/Ton
15	21.3	2.0	0.95	1053
		2.6	1.20	833
		3.2	1.43	699
20	26.9	2.3	1.40	714
		2.6	1.56	641
		3.2	1.87	535
25	33.7	2.6	1.99	503
		3.2	2.41	415
		4.0	2.93	341
32	42.4	2.6	2.55	392
		3.2	3.09	324
		4.0	3.79	264
40	48.3	2.9	3.25	308
		3.2	3.56	281
		4.0	4.37	229
50	60.3	2.9	4.11	243
		3.6	5.03	199
		4.5	6.19	162
65	76.1	2.9	5.24	191
		3.6	6.44	155
		4.5	7.95	126
80	88.9	3.2	6.76	148
		4.0	8.38	119
		4.8	9.96	100
90	101.6	3.6	8.70	115
		4.0	9.63	104
		4.8	11.46	87
100	114.3	3.6	9.83	102
		4.5	12.19	82
		5.4	14.50	69

NB (mm)	OUTSIDE DIAMETER (mm)	WALL THICKNESS (mm)	NOMINAL WEIGHT GALVANISED & BLACK TUBES	
			PLAIN END	
			Kg/M	Mtr/Ton
125	139.7	4.5	15.0	67
		4.8	15.97	63
		5.4	17.89	56
150	165.1	4.5	17.82	56
		4.8	18.98	53
		5.4	21.27	47
150	168.3	5.9	23.20	43
		6.3	24.67	41
		4.5	18.18	55
150	168.3	4.8	19.35	52
		5.4	21.69	46
		6.3	25.17	40
175	193.7	4.8	22.36	45
		5.4	25.08	40
		5.9	27.33	37
175	193.7	6.3	29.12	34
		8.0	36.64	27
		4.8	25.37	39
200	219.1	5.6	29.49	34
		5.9	31.02	32
		6.3	33.06	30
200	219.1	8.0	41.65	24
		10.0	51.57	19
		5.9	38.86	26
250	273	6.3	41.44	24
		8.0	52.28	19
		10.0	64.86	15
300	323.9	6.3	49.34	20
		8.0	62.32	16
		10.0	77.41	13

JINDAL-HISSAR MANUFACTURES PIPE SIZE 15mm NB to 300mm NB, BOTH BLACK & GI, BIS LICENCE NO. CM/L - 0641038

Outside Diameter	Upto & Including 48.3mm = +0.4mm, -0.8 mm Over 48.3 mm = ±1%
Thickness	± 10% (For All Sizes)
Weight	Single Tubes: ± 10 % 10 Ton lots : ± 7.5 %

GRADE	Y.S. (min) MPa	T.S. (min) MPa	%Elongation
YST – 210	210	330	20
YST – 240	240	410	17
YST – 310	310	450	14
YST – 355	355	490	10

STEEL TUBES FOR MECHANICAL AND GENERAL ENGINEERING PURPOSES

TECHNICAL DATA OF BLACK & GALVANISED PIPES SPECIFICATION IS:3601: 2006

NB (mm)	OUTSIDE DIAMETER (mm)	WALL THICKNESS (mm)	NOMINAL WEIGHT GALVANISED & BLACK TUBES	
			PLAIN END	
			Kg/M	Mtr/Ton
15	21.3	1.8	0.866	1155
		2.0	0.952	1053
		2.6	1.20	833
		3.2	1.43	699
		4.0	1.71	585
20	26.9	1.8	1.11	901
		2.0	1.23	813
		2.3	1.40	714
		2.6	1.56	641
		3.2	1.87	535
25	33.7	2.0	1.56	641
		2.3	1.78	562
		2.6	1.99	503
		3.2	2.41	415
		4.0	2.93	341
32	42.4	2.3	2.27	441
		2.6	2.55	392
		3.2	3.09	324
		3.6	3.44	291
		4.0	3.79	264
40	48.3	2.3	2.61	383
		2.6	2.93	341
		2.9	3.25	308
		3.2	3.56	281
		3.6	3.97	252
50	60.3	2.3	4.37	229
		2.6	3.29	304
		2.9	3.70	270
		3.2	4.11	243
		3.6	4.51	222
65	76.1	3.6	5.03	199
		4.0	5.55	180
		4.5	6.19	162
		2.6	5.24	191
		2.9	5.75	174
80	88.9	3.2	6.44	155
		3.6	7.11	141
		4.5	7.95	126
		5.0	8.77	114
		2.9	6.15	163
80	88.9	3.2	6.76	148
		4.0	8.38	119
		5.0	10.3	97

JINDAL-HISSAR MANUFACTURES PIPE AS PER IS 3601 SIZE 15mm NB to 300mm NB, BIS LICENCE NO CM/L 9598516WT 210 WT 240

NB (mm)	OUTSIDE DIAMETER (mm)	WALL THICKNESS (mm)	NOMINAL WEIGHT GALVANISED & BLACK TUBES	
			PLAIN END	
			Kg/M	Mtr/Ton
90	101.6	3.6	8.70	115
		4.0	9.63	104
		5.0	11.90	84
100	114.3	3.2	8.77	114
		3.6	9.83	102
		4.5	12.2	82
		5.4	14.5	69
125	139.7	6.3	16.8	60
		3.6	12.1	83
		4.0	13.4	75
		4.5	15.0	67
		5.0	16.6	60
150	165.1	5.4	17.9	56
		6.3	20.7	48
		4.5	17.8	56
		5.0	19.7	51
150	168.3	5.4	21.2	47
		6.3	24.8	40
		4.0	16.2	62
		4.5	18.2	55
		5.0	20.1	50
175	193.7	5.4	21.7	46
		6.3	25.2	40
		7.1	28.2	35
		4.8	22.36	45
		5.4	25.08	40
200	219.1	5.9	27.33	37
		6.3	29.12	34
		8.0	36.64	27
		4.5	23.82	42
		5.0	26.04	38
250	273	5.6	29.48	34
		6.3	33.06	30
		8.0	41.65	24
		10.0	51.57	19
		5.0	33.00	30
300	323.9	6.3	41.04	24
		7.1	46.60	21
		10.0	64.90	15
		5.6	44.00	23
		7.1	55.50	18
300	323.9	8.0	62.30	16
		10.0	77.40	13

GRADE	Y.S. (min)	T.S. (min)	%Elongation (min)	
			<33.7mm OD	>33.7mm OD
WT 160	160	310	15	22
WT 210	210	330	12	20
WT 240	240	410	10	15
WT 310	310	450	06	10

ERW STEEL TUBES FOR IDLERS FOR BELT CONVEYORS

TECHNICAL DATA OF PIPES SPECIFICATION AS PER IS:9295 – 1983 DIMENSIONS & NOMINAL MASSES

OUTSIDE DIAMETER (mm)	THICKNESS (mm)	Mass Kg/m
63.5	3.65	5.39
	4.50	6.55
76.1	3.65	6.52
	4.50	7.95
88.9	4.05	8.47
	4.85	10.05
101.6	6.30	12.83
	4.05	9.74
	4.85	11.57
	6.30	14.81
114.3	4.50	12.19
	5.40	14.50
139.7	6.30	16.78
	4.50	15.00
	4.85	16.13
	5.40	17.89
	6.30	20.73
165.1	4.50	17.80
	4.85	19.17
	5.40	21.27
	6.30	24.67

OUTSIDE DIAMETER (mm)	THICKNESS (mm)	Mass Kg/m
168.3	4.50	18.20
	4.85	19.55
	5.40	21.69
193.7	6.30	25.17
	5.40	25.10
	6.30	29.12
219.1	7.10	32.67
	5.40	28.50
	6.30	33.06
	7.10	37.12

TOLERANCES

DIMENSION

Outside Diameter $\pm 0.8\%$

Ovality Below 168.3mm OD 0.5mm

Ovality Above 168.3mm OD 1.0mm

Thickness $\pm 10\%$

MASS

Weight Kg/Mtrs – Single Tube $\pm 10\%$

For Truck Load of 10 Tons $\pm 7.5\%$

JINDAL-HISSAR Manufactures Pipe Size from 63.5mm to 219.1mm OD, Both Black & GI Licence No. CM/L 9200109912



Manufacturing Process

The process utilises the latest technology and modern equipments for producing high Quality ERW Pipes

1. Slit Preparations

HR Colis are slitted to predetermined widths for each size of pipe and thickness. Slitted coil is uncoiled at the entry of ERW mill and the ends are sheared and welded one after another to make it single endless strip.

2. Forming

Slitted coil are initially formed into 'U' shape and then into a cylindrical shape with open edges using a series of forming rolls.

3. Welding

The open edges are heated to the required temperature through high frequency low voltage high current and press welded by forge rolls making perfect and strong butt-weld without filler materials.

4. Debeading

Weld flash on top and inside (if need) is trimmed out through carbide tools.

5. Seam Annealing

Whenever required, welding portion and heat affected zone is put to normalising with medium frequency normaliser and then cooled down in air cooling bed.

6. Sizing & Cutting

After water quenching, slight reduction is applied to pipes with sizing rolls to give them desired accurate outside diameter.

Pipes are cut to required lengths by flying cut off disc/saw cutter.


7. Facing and Bevelling

The pipe ends are faced and bevelled by the end facer.

All the processes are continuous with auto arrangements. These plain ended tubes go for further processing as per the customer need like galvanizing, threading, black varnishing etc.


8. Packing

Finished pipes are bundled in desired number of pieces as per customer's requirement and packed properly to ensure freshness till delivery.

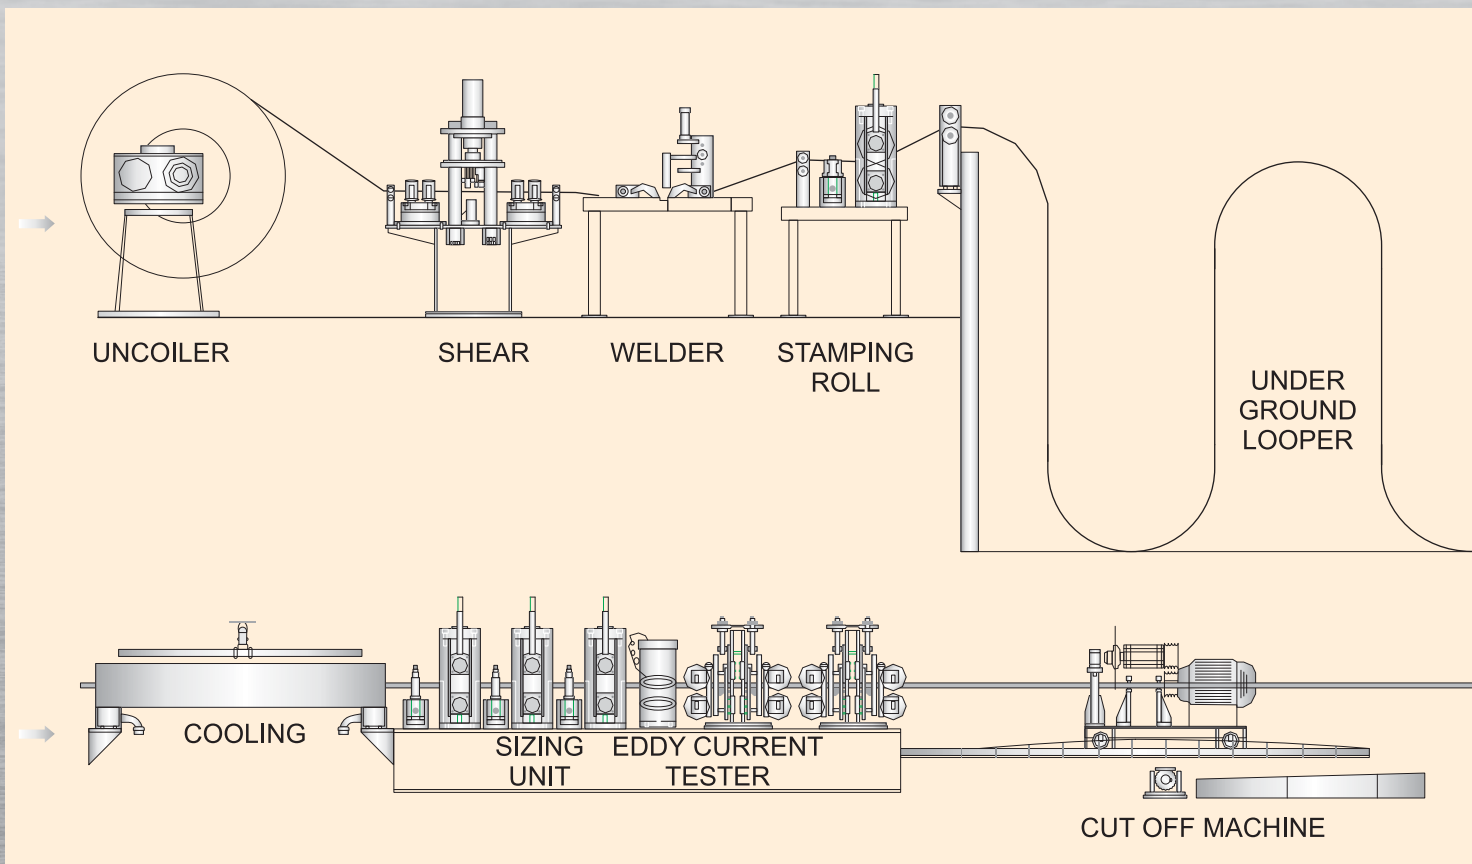


Quality - a prerequisite

Sr. No.	Machine	Purpose
1	Universal Testing Machines 100 Ton	For material testing (mechanical properties).
2	Non Destructive Test a. Eddy Current Testing Machine b. Automatic Ultrasonic Testing For Pipe Weld & Body	For on line flaw detection on welds & HAZ. Detection of defects in steel and welding.
3	Hydro Testing Machine	High Pressure Testing upto 450kg/cm ² .
4	Vickers Micro Hardness Tester	For checking micro hardness on weld, heat affected zone and material.
5	Digital Ultrasonic Thickness Gauge	For checking thickness & pipes.
6	Mandrels and Fixtures	For welding root bend test.
7	Hydraulic Press	For flattening and weld ductility test.
8	Bending Machine	For pipe bend test.
9	Impact Testing Machine (300J)	For Impact Test.
10	Boroscope	For Internal Visual Inspection
11	Spectro Analyser	For Chemical Analysis
12	Metallurgical Microscope	Micro-structure Study of Steel
13	DWTT Machine	To determine fracture ductility of Line Pipe

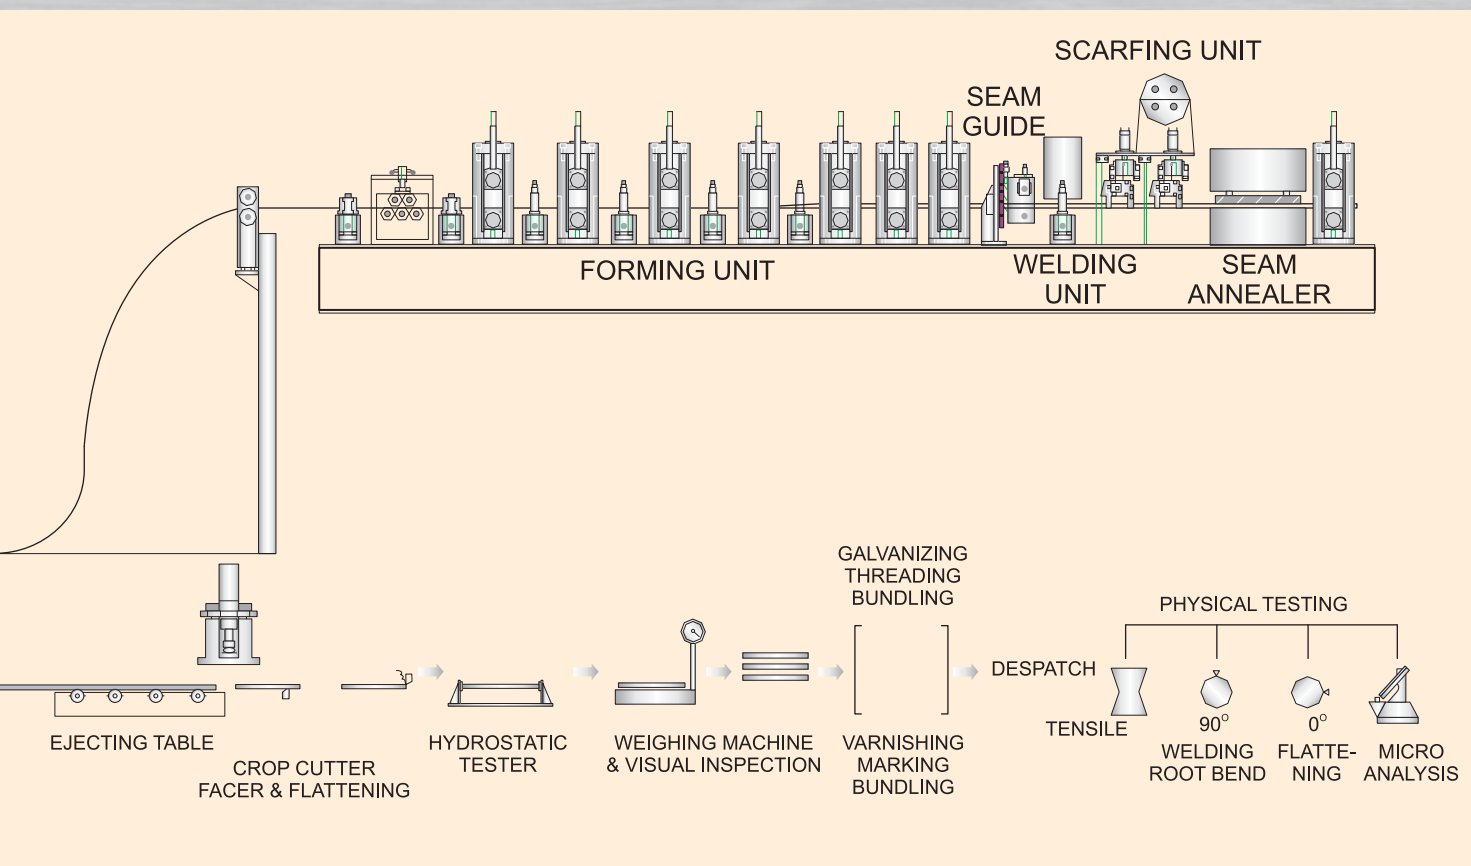

SWAGED TYPE STEEL TUBULAR POLES AS PER IS:2713 (PART II)-1980-410 SP-MPA

Designation	Overall Length	Planting Depth	Load Applied from Top at a Distance of	Height above ground H	Length of Sections			Outside Diameter and Thickness of Sections			Approx Weight of Pole	Breaking Load	Crippling Load	Working Load		Load for Permanent Set not Exceeding 1.3mm	Load for Temporary Deflection of 1.57.5mm
					Bottom h3	Middle h2	Top h1	Bottom h3	Middle h2	Top h1				Col 14 2	Col 13 2.5		
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
(m)	(m)	(m)	(m)	(m)	(m)	(m)	(m)	(mm)	(mm)	(mm)	(Kg)	(Kg)	N (Kg)	N (Kg)	N (Kg)	N (Kg)	N (Kg)
41OSP-1	7.00	1.25	0.30	5.75	4.00	1.50	1.50	114.3x3.65	88.9 x3.25	76.1X3.25	62	2570 (262)	1820(186)	912(93)	1030(105)	1245(127)	785(80)
41OSP-2	7.00	1.25	0.30	5.75	4.00	1.50	1.50	114.3x4.50	88.9 x4.05	76.1X3.25	73	3100(316)	2240(224)	1100(112)	1240(126)	1510(154)	941(96)
41OSP-3	7.00	1.25	0.30	5.75	4.00	1.50	1.50	114.3x5.40	88.9 x4.85	76.1X3.25	85	3630(370)	2580(263)	1280(131)	1450(148)	1760(180)	1090(111)
41OSP-4	7.50	1.25	0.30	6.25	4.50	1.50	1.50	114.3x3.65	88.9 x3.25	76.1X3.25	67	2350(240)	1670(170)	1320(135)	941(96)	1150(117)	627(64)
41OSP-5	7.50	1.25	0.30	6.25	4.50	1.50	1.50	114.3x4.50	88.9 x4.05	76.1X3.25	79	2760(281)	1960(200)	981(100)	1100(112)	1340(137)	745(76)
41OSP-6	7.50	1.25	0.30	6.25	4.50	1.50	1.50	114.3x5.40	88.9 x4.85	76.1X3.25	93	3320(339)	2360(241)	1180(120)	1330(136)	1620(165)	873(89)
41OSP-7	7.50	1.25	0.30	6.25	4.50	1.50	1.50	139.7x4.50	114.3x3.65	89.9X3.25	97	4330(442)	3080(314)	1540(157)	1740(177)	2110(215)	1400(143)
41OSP-8	7.50	1.25	0.30	6.25	4.50	1.50	1.50	139.7x4.85	114.3x3.65	89.9X3.25	103	4630(472)	3280(335)	1650(168)	1850(189)	2250(229)	1480(151)
41OSP-9	7.50	1.25	0.30	6.25	4.50	1.50	1.50	139.7x5.40	114.3x3.65	89.9X3.25	110	5100(520)	3620(369)	1810(185)	2040(208)	2480(253)	1600(163)
41OSP-10	8.00	1.50	0.30	6.50	4.50	1.75	1.75	114.3x3.65	88.9 x3.25	76.1X3.25	70	2260(230)	1600(163)	804(82)	902(92)	1110(112)	520(53)
41OSP-11	8.00	1.50	0.30	6.50	4.50	1.75	1.75	114.3x4.50	88.9 x4.05	76.1X3.25	83	2730(278)	1930(197)	971(99)	1090(111)	1320(135)	618(63)
41OSP-12	8.00	1.50	0.30	6.50	4.50	1.75	1.75	114.3x5.40	88.9 x4.85	76.1X3.25	97	3190(325)	2270(231)	1130(115)	1270(130)	1550(158)	725(74)
41OSP-13	8.00	1.50	0.30	6.50	4.50	1.75	1.75	139.7x4.50	114.3x3.65	89.9X3.25	101	4160(424)	2950(301)	1480(151)	1670(170)	2020(206)	1180(120)
41OSP-14	8.00	1.50	0.30	6.50	4.50	1.75	1.75	139.7x4.85	114.3x4.50	89.9X3.25	111	4440(453)	3160(322)	1580(161)	1770(181)	2160(220)	1280(131)
41OSP-15	8.00	1.50	0.30	6.50	4.50	1.75	1.75	139.7x5.40	114.3x4.50	89.9X3.25	109	4890(499)	3470(354)	1740(177)	1960(200)	2380(243)	1380(140)
41OSP-16	8.50	1.50	0.30	7.00	5.00	1.75	1.75	114.3x3.65	88.9 x3.25	76.1X3.25	75	2090(213)	1480(151)	745(76)	834(85)	1020(104)	432(44)
41OSP-17	8.50	1.50	0.30	7.00	5.00	1.75	1.75	114.3x4.50	88.9 x4.05	76.1X3.25	89	2520(257)	1790(182)	893(91)	1010(103)	1230(125)	510(52)
41OSP-18	8.50	1.50	0.30	7.00	5.00	1.75	1.75	114.3x5.40	88.9 x4.85	76.1X3.25	104	2950(301)	2100(214)	1050(107)	1180(120)	1430(146)	598(61)
41OSP-19	8.50	1.50	0.30	7.00	5.00	1.75	1.75	139.7x4.50	114.3x3.65	89.9X3.25	109	3844(392)	2730(278)	1360(139)	1540(157)	1800(191)	961(98)
41OSP-20	8.50	1.50	0.30	7.00	5.00	1.75	1.75	139.7x4.85	114.3x3.65	89.9X3.25	115	5110(419)	2910(297)	1460(140)	1650(168)	2000(204)	1010(103)
41OSP-21	8.50	1.50	0.30	7.00	5.00	1.75	1.75	139.7x5.40	114.3x4.50	89.9X3.25	129	4530(462)	3220(328)	1620(164)	1810(185)	2210(225)	1130(115)
41OSP-22	8.50	1.50	0.30	7.00	5.00	1.75	1.75	165.1x4.50	139.7x4.50	114.3x3.65	141	5450(556)	3870(395)	1930(197)	2180(222)	2650(270)	1730(176)
41OSP-23	8.50	1.50	0.30	7.00	5.00	1.75	1.75	165.1x4.85	139.7x4.50	114.3x3.65	148	5840(596)	4150(423)	2080(212)	2330(238)	2840(290)	1820(186)
41OSP-24	8.50	1.50	0.30	7.00	5.00	1.75	1.75	165.1x5.40	139.7x4.50	114.3x3.65	158	6450(658)	4580(467)	2340(234)	2579(263)	3140(320)	1970(201)
41OSP-25	9.00	1.50	0.30	7.50	5.00	2.00	2.00	114.3x3.65	88.9 x3.25	76.1X3.25	78	1940(198)	1380(141)	686(70)	775(79)	941(96)	333(34)
41OSP-26	9.00	1.50	0.30	7.50	5.00	2.00	2.00	114.3x4.50	88.9 x4.05	76.1X3.25	92	2340(239)	1670(170)	834(85)	941(96)	1140(116)	402(41)
41OSP-27	9.00	1.50	0.30	7.50	5.00	2.00	2.00	114.3x5.40	88.9 x4.85	76.1X3.25	108	2750(280)	1950(199)	971(99)	1100(112)	1330(136)	461(47)
41OSP-28	9.00	1.50	0.30	7.50	5.00	2.00	2.00	139.7x4.50	114.3x3.65	89.9X3.25	113	3580(365)	2540(259)	1270(130)	1430(146)	1740(117)	745(76)
41OSP-29	9.00	1.50	0.30	7.50	5.00	2.00	2.00	139.7x4.85	114.3x3.65	89.9X3.25	125	3820(390)	2728(277)	1350(138)	1530(156)	1860(190)	814(83)
41OSP-30	9.00	1.50	0.30	7.50	5.00	2.00	2.00	139.7x5.40	114.3x4.50	89.9X3.25	133	4220(430)	2990(305)	1500(153)	1690(172)	2050(209)	882(90)
41OSP-31	9.00	1.50	0.30	7.50	5.00	2.00	2.00	165.1x4.50	139.7x4.50	114.3x3.65	147	5070(517)	3600(367)	1800(184)	2030(207)	2460(251)	1360(139)
41OSP-32	9.00	1.50	0.30	7.50	5.00	2.00	2.00	165.1x4.85	139.7x4.50	114.3x3.65	154	5430(554)	3850(393)	1930(197)	2180(222)	2640(269)	1430(146)
41OSP-33	9.00	1.50	0.30	7.50	5.00	2.00	2.00	165.1x5.40	139.7x4.50	114.3x3.65	164	6000(612)	4270(435)	2130(217)	2410(245)	2910(297)	1540(157)

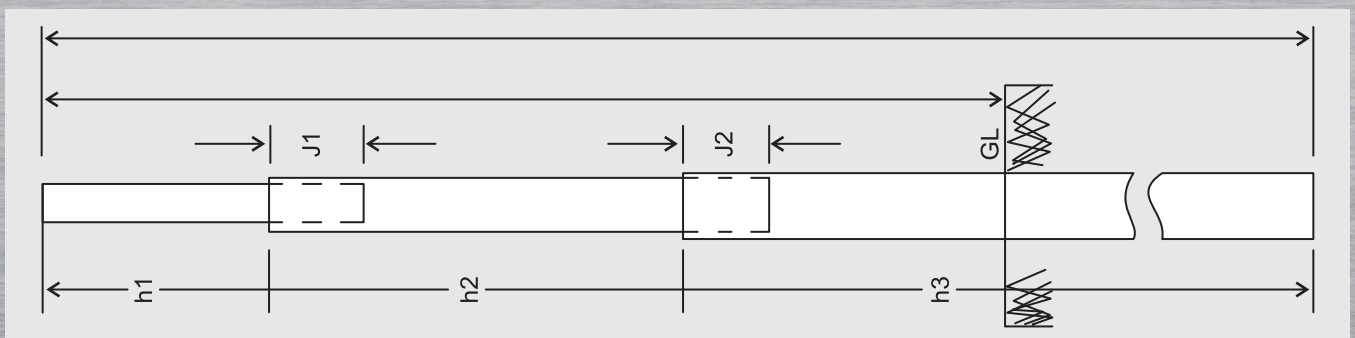


Weight: (-) 5% on lot basis & (-) 7.5% on individual Pole

Straightness: The finished pole shall not out of straightness by more than 1/600 of 1st length

SWAGED TYPE STEEL TUBULAR POLES AS PER IS:2713 (PART II)-1980-410 SP-MPA

Designation	Overall Length	Planting Depth	Load Applied from Top at a Distance of	Height above ground H	Length of Sections			Outside Diameter and Thickness of Sections			Approx Weight of Pole	Breaking Load	Crippling Load	Working Load		Load for Permanent Set not Exceeding 1.3mm	Load for Temporary Deflection of 1.57 .5mm
					Bottom h3	Middle h2	Top h1	Bottom h3	Middle h2	Top h1				Col 14 2	Col 13 2.5		
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
(m)	(m)	(m)	(m)	(m)	(m)	(m)	(m)	(mm)	(mm)	(mm)	(Kg)	(Kg)	N (Kg)	N (Kg)	N (Kg)	N (Kg)	N (Kg)
410-SP-34	9.50	1.80	0.60	7.70	5.00	2.25	2.25	139.7x4.50	114.3x4.50	89.9X3.25	122	3630(370)	2580(263)	1280(131)	1450(148)	1760(180)	745(76)
410-SP-35	9.50	1.80	0.60	7.70	5.00	2.25	2.25	139.7x4.85	114.3x4.50	89.9X3.25	129	3880(396)	2760(281)	1390(142)	1550(158)	1880(192)	784(80)
410-SP-36	9.50	1.80	0.60	7.70	5.00	2.25	2.25	139.7x5.40	114.3x4.50	89.9X3.25	137	4280(436)	3040(310)	1520(155)	1710(174)	2080(212)	833(85)
410-SP-37	9.50	1.80	0.60	7.70	5.00	2.25	2.25	165.1x4.50	139.7x4.50	114.3x3.65	153	5150(525)	3660(373)	1820(186)	2060(210)	2500(255)	1300(133)
410-SP-38	9.50	1.80	0.60	7.70	5.00	2.25	2.25	165.1x4.85	139.7x4.50	114.3x3.65	160	5510(562)	3910(399)	1960(200)	2210(225)	2680(273)	1370(140)
410-SP-39	9.50	1.80	0.60	7.70	5.00	2.25	2.25	165.1x5.40	139.7x4.50	114.3x3.65	170	6090(621)	4320(441)	2160(220)	2430(248)	2960(302)	1480(151)
410-SP-40	10.00	1.80	0.60	8.20	5.20	2.40	2.40	139.7x4.50	114.3x4.50	89.9X3.25	128	3390(346)	2410(246)	1210(123)	1350(138)	1650(168)	608(62)
410-SP-41	10.00	1.80	0.60	8.20	5.20	2.40	2.40	139.7x4.85	114.3x4.50	89.9X3.25	135	3630(370)	2580(263)	1280(131)	1450(148)	1760(180)	637(65)
410-SP-42	10.00	1.80	0.60	8.20	5.20	2.40	2.40	139.7x5.40	114.3x4.50	89.9X3.25	144	3990(407)	2830(289)	1410(144)	1600(163)	1940(198)	677(69)
410-SP-43	10.00	1.80	0.60	8.20	5.20	2.40	2.40	165.1x4.50	139.7x4.50	114.3x3.65	160	4810(490)	3410(348)	1710(174)	1920(196)	2330(238)	1060(108)
410-SP-44	10.00	1.80	0.60	8.20	5.20	2.40	2.40	165.1x4.85	139.7x4.50	114.3x3.65	168	5150(525)	3660(373)	1820(186)	2060(210)	2500(255)	1120(114)
410-SP-45	10.00	1.80	0.60	8.20	5.20	2.40	2.40	165.1x5.40	139.7x4.50	114.3x3.65	178	5690(580)	4040(412)	2020(206)	2280(232)	2760(282)	1200(122)
410-SP-46	10.00	1.80	0.60	8.20	5.20	2.40	2.40	193.7x4.85	165.1x4.50	139.7x4.50	208	7210(735)	5120(522)	2560(261)	2880(294)	3500(357)	1850(189)
410-SP-47	10.00	1.80	0.60	8.20	5.20	2.40	2.40	193.7x5.40	165.1x4.50	139.7x4.50	221	7910(807)	5620(573)	2800(286)	3170(323)	3840(392)	1990(203)
410-SP-48	10.00	1.80	0.60	8.20	5.20	2.40	2.40	193.7x5.90	165.1x4.50	139.7x4.50	233	8620(879)	6120(624)	3060(312)	3450(352)	4190(427)	2110(215)
410-SP-49	11.00	1.80	0.60	9.20	5.60	2.70	2.70	139.7x4.50	114.3x4.50	89.9X3.25	140	3000(306)	2130(217)	1070(109)	1200(122)	1460(149)	412(42)
410-SP-50	11.00	1.80	0.60	9.20	5.60	2.70	2.70	139.7x4.85	114.3x4.50	89.9X3.25	147	3210(327)	2280(232)	1140(116)	1280(131)	1560(159)	431(44)
410-SP-51	11.00	1.80	0.60	9.20	5.60	2.70	2.70	139.7x5.40	114.3x4.50	89.9X3.25	164	3530(360)	2510(256)	1260(128)	1410(144)	1720(175)	480(49)
410-SP-52	11.00	1.80	0.60	9.20	5.60	2.70	2.70	165.1x4.50	139.7x4.50	114.3x3.65	175	4250(433)	3010(307)	1510(154)	1700(173)	2060(210)	726(74)
410-SP-53	11.00	1.80	0.60	9.20	5.60	2.70	2.70	165.1x4.85	139.7x4.50	114.3x3.65	183	4550(464)	3230(329)	1620(165)	1820(186)	2220(226)	765(78)
410-SP-54	11.00	1.80	0.60	9.20	5.60	2.70	2.70	165.1x5.40	139.7x4.50	114.3x3.65	194	5030(513)	3570(364)	1780(182)	2010(205)	2440(249)	814(83)
410-SP-55	11.00	1.80	0.60	9.20	5.60	2.70	2.70	193.7x4.85	165.1x4.50	139.7x4.50	227	6370(650)	4530(462)	2260(231)	2550(260)	3100(316)	1270(130)
410-SP-56	11.00	1.80	0.60	9.20	5.60	2.70	2.70	193.7x5.40	165.1x4.85	139.7x4.50	241	6990(713)	4820(502)	2480(253)	2790(285)	3400(347)	1370(140)
410-SP-57	11.00	1.80	0.60	9.20	5.60	2.70	2.70	193.7x5.90	165.1x4.85	139.7x4.50	256	7620(777)	5410(552)	2710(276)	3050(311)	3710(378)	1470(150)
410-SP-58	12.00	2.00	0.60	10.00	5.80	3.10	3.10	165.1x4.50	139.7x4.50	114.3x3.65	286	3880(396)	2760(281)	1380(141)	1550(158)	1880(192)	539(55)
410-SP-59	12.00	2.00	0.60	10.00	5.80	3.10	3.10	165.1x4.85	139.7x4.50	114.3x3.65	297	4160(424)	2950(301)	1480(151)	1670(170)	2020(206)	569(58)
410-SP-60	12.00	2.00	0.60	10.00	5.80	3.10	3.10	165.1x5.40	139.7x4.50	114.3x3.65	208	4600(469)	3270(333)	1630(166)	1840(188)	2240(228)	598(61)
410-SP-61	12.00	2.00	0.60	10.00	5.80	3.10	3.10	193.7x4.85	165.1x4.50	139.7x4.50	245	5820(594)	4140(422)	2070(211)	2330(238)	2830(289)	951(97)
410-SP-62	12.00	2.00	0.60	10.00	5.80	3.10	3.10	193.7x5.40	165.1x4.85	139.7x4.50	259	6390(652)	4540(463)	2270(231)	2560(261)	3110(317)	1010(103)
410-SP-63	12.00	2.00	0.60	10.00	5.80	3.10	3.10	193.7x5.90	165.1x4.85	139.7x4.50	277	6960(710)	4940(504)	2470(252)	2709(284)	3390(345)	1090(111)
410-SP-64	12.00	2.00	0.60	10.00	5.80	3.10	3.10	219.1x4.85	193.7x4.85	165.1x4.50	292	7490(764)	5320(542)	2660(271)	3000(306)	3640(371)	1460(140)
410-SP-65	12.00	2.00	0.60	10.00	5.80	3.10	3.10	219.1x5.40	193.7x4.85	165.1x4.50	313	8530(871)	6060(618)	3030(309)	3410(348)	4150(423)	1610(164)
410-SP-66	12.00	2.00	0.60	10.00	5.80	3.10	3.10	219.1x5.90	193.7x4.85	165.1x4.50	322	8980(916)	6370(560)	3190(325)	3590(366)	4360(445)	1660(169)

JINDAL-HISSAR MANUFACTURES POLES AS PER IS 2713 SIZE 410-SP-01 TO 410-SP-66, LICENCE NO CM/L 9908606

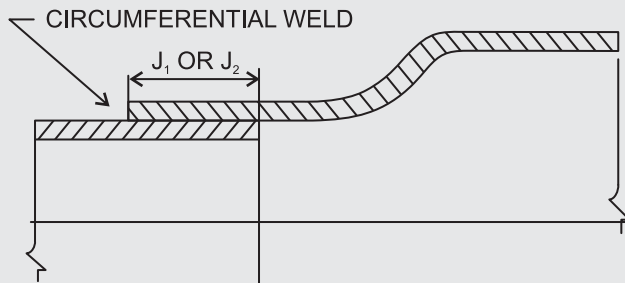

Outside Diameter of Smaller Tube in Joint	Length of Joint (J1 or J2)
mm	mm
76.1	200
88.9	230
114.3	300
139.7	350
165.1	400
193.7	450

Tolerances: Thickness Tolerance up to +/- 10%

Length: of any section +/- 40mm overall length of pole +/- 25 mm

DIMENSIONS AND PROPERTIES OF SQUARE SECTIONS (SHS) AS PER IS:4923-2017

Width (mm)	Depth (mm)	Thickness (mm)	Area (cm ²)	Weight (Kg/Mtr)	Moment of inertia (cm ⁴)		Radius of Gyration (cm)		Radius of Gyration (cm ³)		Radius of Gyration (cm ³)	
					I _x	I _y	R _x	R _y	Z _x	Z _y	S _x	S _y
50	25	2.00	2.74	2.15	8.38	2.81	1.75	1.01	3.35	2.25	4.26	2.62
50	25	2.60	3.46	2.71	10.16	3.36	1.71	0.99	4.06	2.69	5.26	3.21
50	25	3.20	4.13	3.24	11.63	3.80	1.68	0.96	4.65	3.04	6.14	3.73
50	25	4.00	4.95	3.88	13.13	4.23	1.63	0.92	5.25	3.38	7.13	4.29
60	40	2.60	4.76	3.73	22.76	12.09	2.19	1.59	7.59	6.05	9.36	7.07
60	40	2.90	5.25	4.12	24.74	13.11	2.17	1.58	8.25	6.56	10.25	7.73
60	40	3.60	6.35	4.98	28.90	15.23	2.13	1.55	9.63	7.62	12.16	9.15
60	40	4.50	7.67	6.02	33.30	17.43	2.08	1.51	11.10	8.72	14.32	10.75
66	33	2.60	4.70	3.69	25.15	8.43	2.31	1.34	7.62	5.11	9.68	5.94
66	33	2.90	5.19	4.07	27.33	9.12	2.29	1.33	8.28	5.53	10.59	6.49
66	33	3.60	6.28	4.93	31.87	10.52	2.25	1.29	9.66	6.37	12.56	7.66
66	33	4.50	7.58	5.95	36.64	11.93	2.20	1.25	11.10	7.23	14.77	8.94
80	40	2.60	5.80	4.55	46.58	15.73	2.84	1.65	11.64	7.87	14.63	9.01
80	40	2.90	6.41	5.03	50.87	17.11	2.82	1.63	12.72	8.56	16.07	9.88
80	40	3.20	7.01	5.50	54.94	18.41	2.80	1.62	13.74	9.21	17.46	10.72
80	40	4.00	8.55	6.71	64.79	21.49	2.75	1.59	16.20	10.74	20.91	12.77
96	48	3.20	8.54	6.71	98.61	33.28	3.40	1.97	20.54	13.87	25.85	15.91
96	48	4.00	10.47	8.22	117.54	39.32	3.35	1.94	24.49	16.30	31.21	19.14
96	48	4.80	12.31	9.66	134.35	44.55	3.30	1.90	27.99	18.56	36.13	22.08
100	50	3.20	8.93	7.01	112.29	37.95	3.55	2.06	22.46	15.18	28.20	17.37
100	50	3.60	9.95	7.81	123.50	41.56	3.52	2.04	24.70	16.63	31.20	19.19
100	50	4.50	12.17	9.55	146.59	48.87	3.47	2.00	29.32	19.55	37.55	23.00
100	50	5.40	14.28	11.21	166.80	55.09	3.42	1.96	33.36	22.04	43.34	26.43
120	60	3.20	10.85	8.51	199.87	67.94	4.29	2.50	33.31	22.65	41.50	25.63
120	60	3.60	12.11	9.50	220.73	74.76	4.27	2.48	36.79	24.92	46.06	28.40
120	60	4.50	14.87	11.67	264.49	88.87	4.22	2.44	44.08	29.62	55.82	34.30
122	61	3.60	12.32	9.67	232.61	78.83	4.34	2.35	38.13	25.84	47.71	29.42
122	61	4.50	15.14	11.88	278.94	93.78	4.29	2.49	45.72	30.75	57.85	35.56
122	61	5.40	17.85	14.01	320.83	107.03	4.24	2.45	52.60	35.09	67.29	41.22
145	82	4.80	20.28	15.92	555.16	228.50	5.23	3.36	76.57	55.73	94.93	63.93
145	82	5.40	22.60	17.74	610.85	250.59	5.20	3.33	84.26	61.12	105.07	70.66
172	92	4.80	23.83	18.70	917.13	346.91	6.20	3.82	106.64	75.41	132.08	85.61
172	92	5.40	26.59	20.88	1012.47	381.74	6.17	3.79	117.73	82.99	146.55	94.86
200	100	4.00	22.95	18.01	1199.64	410.76	7.23	4.23	119.96	82.15	148.03	91.70
200	100	5.00	28.36	22.26	1459.16	496.92	7.17	4.19	145.92	99.38	181.36	112.09
200	100	6.00	33.63	26.40	1703.17	576.89	7.12	4.14	170.32	115.38	213.25	131.49

TOLERANCES FOR SHS & RHS AS PER IS:4923		
1	Outside Dimensions of the Sides	± 1% with a minimum of 0.5mm
2	Thickness	± 10%
3	Weight	Individual Length + 10%, -8% On lot of 10 tonnes ± 7.5%
4	Squareness of Corner	90° ± 2°
5	Radii of Corners- Outside	3t Max. Where t is the thickness of the section

MECHANICAL PROPERTIES				
Grade	Tensile Strength (MPa)	Yield Stress (MPa)	%Elongation (MIN)	
			Upto 25.4mm	Upto 25.4mm
YSf 210	330	210	12	20
YSf 240	410	240	10	15
YSf 310	450	310	8	10
YSf 355	490	355	8	10





DIMENSIONS AND PROPERTIES OF RECTANGULAR SECTIONS (RHS) AS PER IS:4923-2017

Width (mm)	Depth (mm)	Thickness (mm)	Area (cm ²)	Weight (Kg/Mtr)	moment of inertia (cm ⁴)	Radius of Gyration (cm)	Elastic module (cm ³)	Plastic module (cm ³)
25	25	1.6	1.43	1.12	1.28	0.94	1.02	1.24
25	25	2.0	1.74	1.36	1.48	0.92	1.19	1.47
25	25	2.6	2.16	1.69	1.72	0.89	1.38	1.76
25	25	3.2	2.53	1.98	1.89	0.86	1.51	1.98
32	32	2.0	2.3	1.80	3.36	1.21	2.10	2.54
32	32	2.6	2.88	2.26	4.02	1.18	2.51	3.11
32	32	3.2	3.42	2.69	4.54	1.15	2.83	3.59
32	32	4.0	4.07	3.19	5.02	1.11	3.14	4.11
38	38	2.0	2.78	2.18	5.88	1.46	3.10	3.70
38	38	2.6	3.51	2.75	7.13	1.43	3.76	4.57
38	38	3.2	4.19	3.29	8.18	1.40	4.30	5.34
38	38	4.0	5.03	3.95	9.26	1.36	4.87	6.22
40	40	2.6	3.72	2.92	8.45	1.51	4.22	5.12
40	40	2.9	4.09	3.21	9.11	1.49	4.56	5.58
40	40	3.2	4.45	3.49	9.72	1.48	4.86	6.00
40	40	4.0	5.35	4.20	11.07	1.44	5.54	7.01
49.5	49.5	2.6	4.70	3.69	16.91	1.90	6.83	8.16
49.5	49.5	2.9	5.19	4.07	18.37	1.88	7.42	8.93
49.5	49.5	3.2	5.66	4.44	19.74	1.87	7.97	9.67
49.5	49.5	4.0	6.87	5.39	22.94	1.83	9.27	11.46
60	60	2.6	5.80	4.55	31.33	2.33	10.44	12.34
60	60	2.9	6.41	5.03	34.21	2.31	11.40	13.56
60	60	3.2	7.01	5.50	36.94	2.30	12.31	14.73
60	60	4.0	8.55	6.71	43.55	2.26	14.52	17.64
60	60	4.5	9.47	7.43	47.20	2.23	15.73	19.31
72	72	3.2	8.54	6.71	66.32	2.79	18.42	21.80
72	72	4.0	10.47	8.22	79.02	2.75	21.95	26.32
72	72	4.8	12.31	9.66	90.30	2.71	25.08	30.48
80	80	3.2	9.57	7.51	92.71	3.11	23.18	27.29
80	80	4.0	11.75	9.22	111.04	3.07	27.76	33.07
80	80	4.9	14.10	11.07	129.51	3.03	32.38	39.09
91.5	91.5	3.6	12.32	9.67	156.48	3.56	34.20	40.24
91.5	91.5	4.5	15.14	11.88	187.56	3.52	41.00	48.79
91.5	91.5	5.4	17.85	14.01	215.66	3.48	47.14	56.76
100	100	4.0	14.95	11.73	226.34	3.89	45.27	53.30
100	100	5.0	18.36	14.41	271.08	3.84	54.22	64.59
100	100	6.0	21.63	16.98	311.45	3.79	62.29	75.09
113.5	113.5	4.5	19.10	14.99	372.86	4.42	65.70	77.32
113.5	113.5	4.8	20.28	15.92	393.28	4.40	69.30	81.81
113.5	113.5	5.4	22.60	17.74	432.55	4.38	76.22	90.54
113.5	113.5	6.0	24.87	19.52	469.78	4.35	82.78	98.95
132	132	4.8	23.83	18.70	634.36	5.16	96.11	112.68
132	132	5.4	26.59	20.88	700.07	5.13	106.07	125.01
132	132	6.0	29.31	23.01	762.93	5.10	115.60	136.97
150	150	4.0	22.95	18.01	807.78	5.93	107.70	124.86
150	150	5.0	28.36	22.26	982.07	5.89	130.94	152.97
150	150	6.0	33.63	26.40	1145.84	5.84	152.78	179.87
150	150	7.0	38.78	30.44	1299.36	5.79	173.25	205.57
150	150	8.0	43.79	34.37	1442.89	5.74	192.39	230.09
220	220	4.0	34.15	26.81	2639.06	8.79	239.91	275.46
220	220	5.0	42.36	33.25	3237.9	8.74	294.35	339.72
220	220	6.0	50.43	39.59	3813.19	8.7	346.65	402.16
220	220	7.0	58.38	45.83	4365.33	8.65	396.85	462.81

Technical Data Sheet- Pipe to API 5L 46th Edition / IS/ISO:3183-2019

Out Side Diameter Tolerance	Body	Specified OD	+ 0.0075D (0.75%)
	End	From 88.9 mm OD to 168.3 mm OD	Specified OD +1.60 mm, -0.40 mm
		From 219.1 mm OD mm to 323.9 mm OD	Specified OD +0.005D (+0.5%)
Thickness Tolerances	For thickness < 5.00 mm		+0 .5 mm
	For thickness >5.00 mm to 15 mm		+10%
Weight Tolerances	Special PE pipes (Single Tube)		+10%, - 5%
	For other pipes (Single Tube)		+10% - 3.5%
	Lot of 20 Ton		-1.75%

PHYSICAL PROPERTIES

Grade	PSL-1		PSL-2				Minimum % of Elongation (For PSL-1 & PSL-2)
	Yield Stress (Mpa)	Tensile Strength (Mpa)	Yield Stress (Mpa)		Tensile Strength (Mpa)		
			Min.	Max.	Min.	Max.	
L210/A	210	335					As per Table 6 (c) & 7 (f) of API 5L
L245/B	245	415	245	450	415	655	
L290/X42	290	415	290	495	415	655	
L320/X46	320	435	320	525	435	655	
L360/X52	360	460	360	530	460	760	
L390/X56	390	490	390	545	490	760	
L415/X60	415	520	415	565	520	760	
L450/X65	450	535	450	600	535	760	
L485/X70	485	570	485	635	570	760	

Chemical Properties

Grade	Specified Requirements (%)													
	PSL-1					PSL-2								
	C	Mn	P	S	Others	C	Mn	P	S	Si	V	Nb	Ti	Others
L210/A	0.22	0.90	0.03	0.03		-	-	-	-	-				
L245/B	0.26	1.20	0.03	0.03		0.22	1.20	0.025	0.015	0.45				
L290/X42	0.26	1.30	0.03	0.03		0.22	1.30	0.025	0.015	0.45				
L320/X46	0.26	1.40	0.03	0.03	Nb+V < 0.06%	0.22	1.30	0.025	0.015	0.45	As per Table 5 foot notes			
L360/X52	0.26	1.40	0.03	0.03	Nb+V+Ti < 0.15 % of API 5L	0.22	1.40	0.025	0.015	0.45	d, e, g, h and l of API 5L			
L390/X56	0.26	1.40	0.03	0.03		0.22	1.40	0.025	0.015	0.45				
L415/X60	0.26	1.40	0.03	0.03		0.12	1.60	0.025	0.015	0.45				
L450/X65	0.26	1.45	0.03	0.03		0.12	1.60	0.025	0.015	0.45				
L485/X70	0.26	1.65	0.03	0.03		0.12	1.70	0.025	0.015	0.45				

JINDAL-HISSAR MANUFACTURES PIPE AS PER API 5L SIZE 80mm NB to 300mm NB, API 5L LICENCE NO. 5L-1163

JINDAL-HISSAR MANUFACTURES PIPE AS PER IS/ISO 3183 SIZE 80mm NB to 300mm NB, IS/ISO 3183 LICENCE NO CM/L 9586509



Technical Data Sheet- Pipe to API 5L 46th Edition / IS/ISO:3183-2019



Size (OD) (mm)	Thk (mm)	Hydro Testing Test Pressure (In Kgs)								
		Grades								
		A	B	X42	X46	X52	X56	X60	X65	X70
88.9	4.00	115.7	134.9	159.7	176.2	198.3	214.8	228.6	247.8	267.1
88.9	4.40	127.2	148.4	175.7	193.9	218.1	236.3	251.4	272.6	293.8
88.9	4.80	138.8	161.9	191.7	211.5	237.9	257.7	274.3	297.4	320.5
88.9	5.50	159.0	185.5	219.6	242.3	272.6	295.3	314.3	340.8	367.3
88.9	6.40	185.0	215.9	255.5	282.0	317.2	343.7	365.7	396.5	427.4
88.9	7.10	205.3	239.5	283.5	312.8	351.9	381.2	405.7	439.9	474.1
88.9	7.60	219.7	256.4	303.5	334.8	376.7	408.1	434.3	470.9	507.5
114.3	4.00	90.0	104.9	124.2	137.1	154.2	167.1	177.8	192.8	207.7
114.3	4.40	98.9	115.4	136.6	150.8	169.6	183.8	195.5	212.0	228.5
114.3	4.80	107.9	125.9	149.1	164.5	185.0	200.5	213.3	231.3	249.3
114.3	5.20	116.9	136.4	161.5	178.2	200.5	217.2	231.1	250.6	270.1
114.3	5.60	125.9	146.9	173.9	191.9	215.9	233.9	248.9	269.9	290.8
114.3	6.00	134.9	157.4	186.3	205.6	231.3	250.6	266.6	289.1	311.6
114.3	6.40	143.9	167.9	198.8	219.3	246.7	267.3	284.4	308.4	332.4
114.3	7.10	159.7	186.3	220.5	243.3	273.7	296.5	315.5	342.1	368.8
114.3	7.90	177.7	207.3	245.3	270.7	304.6	329.9	351.1	380.7	410.3
114.3	8.60	193.4	225.6	267.1	294.7	331.5	359.2	382.2	414.4	446.7
141.3	4.00	72.8	84.9	100.5	110.9	124.7	135.1	143.8	155.9	168.1
141.3	4.80	87.3	101.9	120.6	133.1	149.7	162.2	172.6	187.1	201.7
141.3	5.60	101.9	118.8	140.7	155.2	174.6	189.2	201.3	218.3	235.3
141.3	6.60	120.1	140.1	165.8	183.0	205.8	223.0	237.3	257.3	277.3
141.3	7.10	129.2	150.7	178.4	196.8	221.4	239.9	255.2	276.8	298.3
141.3	7.90	143.7	167.7	198.5	219.0	246.4	266.9	284.0	307.9	331.9
141.3	8.70	158.3	184.6	218.6	241.2	271.3	293.9	312.8	339.1	365.5
141.3	9.50	172.8	201.6	238.6	263.3	296.3	320.9	341.5	370.3	399.1
168.3	4.00	61.1	71.3	105.5	116.4	130.9	141.8	150.9	163.6	176.4
168.3	4.40	67.2	78.4	116.0	128.0	144.0	156.0	166.0	180.0	194.0
168.3	4.80	73.3	85.5	126.5	139.6	157.1	170.2	181.1	196.4	211.6
168.3	5.20	79.4	92.7	137.1	151.3	170.2	184.4	196.2	212.7	229.3
168.3	5.60	85.5	99.8	147.6	162.9	183.3	198.5	211.3	229.1	246.9
168.3	6.40	97.7	114.0	168.7	186.2	209.5	226.9	241.5	261.8	282.2
168.3	7.10	108.4	126.5	187.2	206.5	232.4	251.7	267.9	290.5	313.0

Size (OD) (mm)	Thk (mm)	Hydro Testing Test Pressure (In Kgs)								
		Grades								
		A	B	X42	X46	X52	X56	X60	X65	X70
168.3	7.90	120.7	140.8	208.3	229.8	258.5	280.1	298.0	323.2	348.3
168.3	8.70	132.9	155.0	229.4	253.1	284.7	308.5	328.2	355.9	383.6
168.3	9.50	145.1	169.3	250.5	276.4	310.9	336.8	358.4	388.6	418.9
219.1	4.00	46.9	54.7	81.0	89.4	100.6	108.9	115.9	125.7	135.5
219.1	4.80	56.3	65.7	97.2	107.3	120.7	130.7	139.1	150.8	162.6
219.1	5.20	61.0	71.2	105.3	116.2	130.7	141.6	150.7	163.4	176.1
219.1	5.60	65.7	76.6	113.4	125.1	140.8	152.5	162.3	176.0	189.7
219.1	6.40	75.1	87.6	129.6	143.0	160.9	174.3	185.5	201.1	216.8
219.1	7.00	82.1	95.8	141.8	156.4	176.0	190.6	202.9	220.0	237.1
219.1	7.90	92.7	108.1	160.0	176.5	198.6	215.1	228.9	248.2	267.6
219.1	8.20	96.2	112.2	166.1	183.2	206.1	223.3	237.6	257.7	277.7
219.1	8.70	102.1	119.1	176.2	194.4	218.7	236.9	252.1	273.4	294.7
219.1	9.50	111.5	130.0	192.4	212.3	238.8	258.7	275.3	298.5	321.7
273.1	4.00	37.6	43.9	73.7	81.3	91.4	99.0	105.4	114.3	123.2
273.1	4.80	45.2	52.7	88.4	97.5	109.7	118.9	126.5	137.1	147.8
273.1	5.20	48.9	57.1	95.7	105.7	118.9	128.8	137.0	148.6	160.1
273.1	5.60	52.7	61.5	103.1	113.8	128.0	138.7	147.6	160.0	172.4
273.1	6.40	60.2	70.3	117.8	130.0	146.3	158.5	168.6	182.9	197.1
273.1	7.10	66.8	78.0	130.7	144.3	162.3	175.8	187.1	202.9	218.6
273.1	7.80	73.4	85.6	143.6	158.5	178.3	193.1	205.5	222.9	240.2
273.1	8.70	81.9	95.5	160.2	176.8	198.9	215.4	229.2	248.6	267.9
273.1	9.30	87.5	102.1	171.2	189.0	212.6	230.3	245.1	265.7	286.4
323.9	4.40	34.9	40.7	68.3	75.4	84.8	91.9	97.8	106.0	114.2
323.9	4.80	38.1	44.4	74.5	82.2	92.5	100.2	106.6	115.6	124.6
323.9	5.20	41.3	48.1	80.7	89.1	100.2	108.6	115.5	125.3	135.0
323.9	5.60	44.4	51.8	86.9	95.9	107.9	116.9	124.4	134.9	145.4
323.9	6.40	50.8	59.3	99.4	109.6	123.3	133.6	142.2	154.2	166.2
323.9	7.10	56.3	65.7	110.2	121.6	136.8	148.2	157.7	171.0	184.3
323.9	7.90	62.7	73.1	122.6	135.3	152.3	164.9	175.5	190.3	205.1
323.9	8.40	66.7	77.8	130.4	143.9	161.9	175.4	186.6	202.4	218.1
323.9	8.70	69.0	80.5	135.1	149.0	167.7	181.6	193.3	209.6	225.9
323.9	9.50	75.4	88.0	147.5	162.7	183.1	198.3	211.1	228.9	246.7



Technical Specification of Pipes conforming to ASTM A53 Grade A & B

NPS Designator in inch	DN Designator in mm	Size (OD) in mm	Schedule	Thickness (mm)	Mass of Plain end Pipe (Kg/mtr)	Hydro Test Pressure (MPa)		
						Grade A	Grade B	
½	15	21.3	40	2.77	1.27	4.8	4.8	Tolerances Outside diameter : Pipe size upto and including DN40 ±0.4mm Pipe size DN 50 or larger ± 1 % Thickness : - 12.5 % Weight : ± 10 % Galvanizing (as per ASTM A-90) Mass of Zn coating (Min.): 490 g/m2 (70 µ app.) Mass of Zinc coating (Avg.): 550 g/m2 (79 µ app.) Mechanical Properties Grade A Grade B Y.S (Mpa) Min. - 205 240 T.S. (Mpa)Min. - 330 415 Elong.(%)Min. - As per ASTM A53
	20	26.7	40	2.87	1.69	4.8	4.8	
1	25	33.4	40	3.38	2.50	4.8	4.8	
1	32	42.2	40	3.56	3.39	8.3	9	
1 ½	40	48.3	40	3.68	4.05	8.3	9	
2	50	60.3	40	3.91	5.44	15.9	17.2	
2 ½	65	73.0	40	5.16	8.63	17.2	17.2	
3	80	88.9	40	5.49	11.29	15.3	17.2	
3 ½	90	101.6	40	5.74	13.57	14.0	16.3	
4	100	114.3	40	6.02	16.07	13.1	15.2	
5	125	141.3	40	6.55	21.77	11.5	13.4	
6	150	168.3	40	7.11	28.26	10.5	12.3	
8	200	219.1	40	8.18	42.55	9.2	10.8	
10	250	273.1	20	6.35	41.75	5.8	6.8	
10	250	273.1	40	9.27	60.29	8.4	9.9	
12	300	323.9	20	6.35	49.71	4.9	5.7	
12	300	323.9	30	8.38	65.18	6.4	7.5	
12	300	323.9	STD	9.52	73.78	7.3	8.5	
12	300	323.9	40	10.31	79.7	7.9	9.2	

Chemical Properties (Max %)

Grade	C%	Mn%	P%	S%	Cu%	Ni%	Cr%	Mo%	V%
A	0.25	0.95	0.05	0.045	0.5	0.4	0.4	0.15	0.08
B	0.30	1.20	0.05	0.045	0.5	0.4	0.4	0.15	0.08

JINDAL-HISSAR MANUFACTURES PIPE AS PER ASTM A53 SIZE ½" to 12", BOTH BLACK & GI, UL LISTED LICENCE NO. 3PPPA

Technical Specification of Pipes conforming to BS EN 10255

Specified OD (mm)	Designation of Thread	H Heavy Series				Medium Heavy Series				Light Series				L1 Series				L2 Series									
		Outside Diameter (mm)		Thickness (mm)	Mass per unit length of bare pipe (kg/Mtr.)		Outside Diameter (mm)		Thickness (mm)	Mass per unit length of bare pipe (kg/Mtr.)		Outside Diameter (mm)		Thickness (mm)	Mass per unit length of bare pipe (kg/Mtr.)		Outside Diameter (mm)		Thickness (mm)	Mass per unit length of bare pipe (kg/Mtr.)							
		Max.	Min.		Plain End	Threaded & socketed	Max.	Min.		Plain End	Threaded & socketed	Max.	Min.		Plain End	Threaded & socketed	Max.	Min.		Plain End	Threaded & socketed						
21.3	½	21.8	21.0	3.2	1.44	1.45	21.8	21.0	2.6	1.21	1.22	21.7	21.0	2.3	1.08	1.09	21.7	21.0	2.3	1.08	1.09	21.4	21.0	2.0	0.947	0.956	
26.9		27.3	26.5	3.2	1.87	1.88	27.3	26.5	2.6	1.56	1.57	27.1	26.4	2.3	1.40	1.41	27.1	26.4	2.3	1.39	1.40	26.9	26.4	2.3	1.38	1.39	
33.7	1	34.2	33.3	4.0	2.93	2.95	34.2	33.3	3.2	2.41	2.43	34.0	33.3	2.9	2.20	2.22	34.0	33.2	2.9	2.20	2.22	33.8	33.2	2.6	1.98	2.00	
42.4	1	42.9	42.0	4.0	3.79	3.82	42.9	42.0	3.2	3.10	3.13	42.7	41.9	2.9	2.82	2.85	42.7	41.9	2.9	2.82	2.85	42.5	41.9	2.6	2.54	2.57	
48.3	1 ½	48.8	47.9	4.0	4.37	4.41	48.8	47.9	3.2	3.56	3.60	48.6	47.8	2.9	3.25	3.29	48.6	47.8	2.9	3.24	3.28	48.4	47.8	2.9	3.23	3.27	
60.3	2	60.8	59.7	4.5	6.19	6.26	60.8	59.7	3.6	5.03	5.10	60.7	59.6	3.2	4.51	4.58	60.7	59.6	3.2	4.49	4.56	60.2	59.6	2.9	4.08	4.15	
76.1	2 ½	76.6	75.3	4.5	7.93	8.05	76.6	75.3	3.6	6.42	6.54	76.0	75.2	3.2	5.75	5.87	76.3	75.2	3.2	5.73	5.85	76.0	75.2	3.2	5.71	5.83	
88.9	3	89.5	88.0	5.0	10.3	10.5	89.5	88.0	4.0	8.36	8.53	88.7	87.9	3.2	6.76	6.93	89.4	87.9	3.6	7.55	7.72	88.7	87.9	3.2	6.72	6.89	
101.6	3 ½	-	-	-	-	-	-	-	-	-	-	101.2	100.3	3.6	8.70	8.88	-	-	-	-	-	-	-	-	-	-	-
114.3	4	115.0	113.1	5.4	14.5	14.8	115.0	113.1	4.5	12.2	12.5	113.9	113.0	3.6	9.83	10.1	114.9	113.0	4.0	10.8	11.1	113.9	113.0	3.6	9.75	10.0	
139.7	5	140.8	138.5	5.4	17.9	18.4	140.8	138.5	5.0	16.6	17.1	140.8	138.5	4.5	15.0	15.5	-	-	-	-	-	-	-	-	-	-	-
165.1	6	166.5	163.9	5.4	21.3	21.9	166.5	163.9	5.0	19.8	20.4	166.5	163.9	4.5	17.8	18.4	-	-	-	-	-	-	-	-	-	-	-

Tolerances	Chemical Properties (Max%)	Mechanical Properties	Galvanizing Test
OD :- As per above table	Carbon : 0.20%	Yield Stress : 195 N/mm (Min.)	1. Zinc coating : 55 µ (min.)
Thickness: -	Manganese : 1.40%	Tensile Strength : 320 to 520 N/mm	2. Adhesion test (upto 60.3 mm OD)
± 10% (For H, M & L Series)	Phosphorus : 0.035%	%Elongation : 20 % (Min.)	
± 8% (For L1 & L2 Series)	Sulphur : 0.030%	Bend Test:-	
Weight:		For tubes upto & including 60.3 mm OD	
± 7.5% (For H, M & L Series)		Bending Angle : 90	
-8%,+10% (For L1 & L2 Series)		Bending radius : 3 D	
		Flattening Test:-	
		For tubes above 60.3 mm OD	
		1.Flatten upto 75% of OD for weld test weld at 12 of 3 O'clock.	
		2.Flatten upto 60% of OD for raw material test	


JINDAL-HISSAR MANUFACTURES PIPEAS PER EN 10255 SIZE ½" to 6", BOTH BLACK & GI, 13315-2018-CE-IND-DNV



Our Esteemed Customers



JJM (HP)
JJM (MP)
JJM (J&K)



PHARMA
SECTOR

Our Marketing Network

Haryana

307, 3rd Floor, MGF Metropolis Mall,
Near MG Road Metro Station, Gurugram – 122001.

U.P.

102, PIE 7th Miles, Giani Border,
P.O. Chikamberpur, (Ghaziabad) U.P.
Ph: +91-120-4134289. M-9810162296

Punjab

Vill. Kumbh, Amlah Road, Mandi Gobindgarh (P.B.)
Ph: +91-1765-242908, 242907. M-9256301486

Telangana

4-3-104-108/17/203, 2nd Floor, Anjaiah Complex,
Hill Street, Ranigunj, Secundrabad – 500003, Telangana
M-8008249707

Karnataka

164, 1st Floor, 4th Cross Road, K.S. Garden,
Lal Bagh Road, Bangalore – 560027
Ph: 080-41554473, M-8050072302

Tamil Nadu

334, Poonamallee farms, color homes,
Soprenchri village, Pattabiram, Chennai 600072
Mob. 7496952374

Chandigarh

SCO 827, Top Floor, NAC Kalka Road,
Manimajra, Chandigarh
Ph: 0172-3938570, M-9876871980

Rajasthan

Office No. F1, Shop No. 11 & 12, First Floor,
Extn. Sharma Colony, Swej Farm, Nandpur Road,
Sodala, Jaipur-302019 (Rajasthan)

Mob. 9261620007

Maharashtra

114-B, Vardhman Chambers, Near HDFC Bank,
Sec.-17, Vashi, Navi Mumbai-400705
M – 9920887727



JINDAL INDUSTRIES PRIVATE LIMITED

Manufacturers of ERW BLACK & GALVANISED STEEL PIPES,
HOLLOW STEEL SECTION, LINE PIPES & SWAGED TUBULAR POLES

Regd. Office & Works:

O.P. JINDAL MARG, MODEL TOWN, HISAR – 125005 (HARYANA) INDIA
PHONES: 01662-220781(4LINES) MOBILE: 9812032935, 9812600563